




High-Performance
Self-Leveling Underlayment

Platform L3



For projects that you can only afford to do once. **Platform L3** quickly fixes uneven or damaged floors with minimal prep. Powered by **Synthecem™** technology, it provides a smooth, durable surface, ready for flooring in as little as 12 hours.

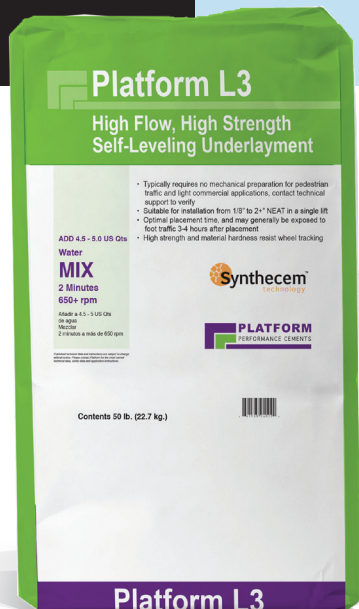

FEATURES

- › Smooth, flat, hard surface suitable for vinyl, LVT, carpet, engineered wood, ceramic and more
- › Made with **Synthecem™** Technology, a hydraulic cement underlayment technology that optimizes successful installations
- › Low surface preparation
- › Install 1/8" to 2" NEAT in a single lift
- › Extended placement time
- › Foot traffic in 3 - 4 hours
- › Hard surface withstands trade traffic

SUITABLE SUBSTRATES

- › Concrete, concrete plank
- › Existing patching and leveling materials
- › Sound gypsum
- › Steel pan
- › Cement or epoxy terrazzo
- › Well bonded existing flooring such as VCT, ceramic tile
- › Non-soluble, non PSA adhesive residue



Premium, high-flow, self-leveling underlayment for flat, smooth floors.

Platform L3 is a high-performance, self-leveling underlayment designed to fix uneven or damaged floors with minimal prep. Powered by advanced Synthecem™ technology, it delivers rapid hardening, high strength, and a smooth, durable surface ready for flooring in as little as 12 hours. It resists wheel tracking, bonds to various substrates like concrete, wood, and gypsum, and can be applied from 1/8" to over 2" in a single pour. With over 5,000 psi strength, it's tough enough for light trade traffic in just 12 hours.

Properties

Compressive Strength (ASTM C109M) (Modified – Dry Cure)	24 hours:	>1200 psi
	7 days:	>2500 psi
	28 days:	>5000 psi
Working Time		15-20 Minutes
Time to foot traffic		3-4 hour
Time to flooring		
Breathable Flooring:	<1" depth - 16 hrs to flooring*	
Non Breathable Flooring:	<1/2" depth - 24 hrs to flooring*	
	*for greater depths see tables in TDS	
Application Conditions	Adjust temperature of material by using warm or cold water for mixing: 50°F to 90°F	
Density	120 - 130 lbs/cu ft.	
Flammability	Flame Spread 0, Fuel Contribution 0, Smoke Development 0 Acceptable for use on UL Fire Rated Floor Assemblies*	
Approximate Coverage*	50 lbs - Approx. 25 sq ft @ 1/4"	
Yield	50 lbs - 0.48 cu ft	
Water per 50lb unit	4.5 - 5 US qts per 50 lbs	
	4.25 - 4.73 l per 22.7 kg	
Color	Gray	


All specifications were tested in laboratory conditions: 73°F in a controlled environment using our approved water content. Changing the temperature, or mixing ratios, or the environment can effect these specifications. Call Technical Services if you have any questions.

**Coverage shown is for estimating purposes only. Actual jobsite coverage may vary according to substrate conditions, type of equipment, thickness applied and application methods used.*

Leed Credit LCD Rapid may contribute to LEED certification of projects as follows:

AREA	CREDIT	CATEGORY	HOW
Indoor Environmental Quality	EQ 4.2	Low Emitting Materials	VOC content 0g/l (calculated)
Materials & Resources	MR 4.1, 4.2	Recycled Content	0%
Regional Manufactured Material	MR 5.1, 5.2	Regional Materials (Cleveland, Ohio)	> 50%

Compliance tested to California Department of Public Health (CDPH/EHLB/ Standard Method) V 1.2 - 2017

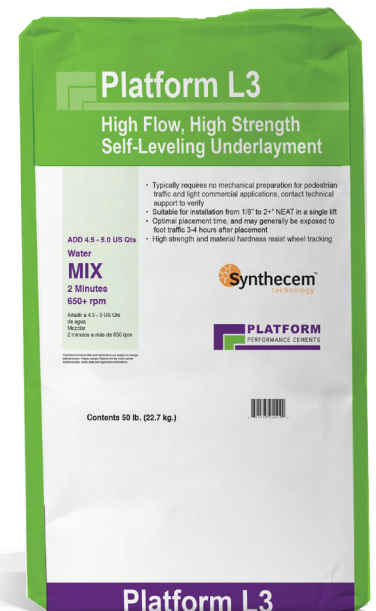

Dependable LLC

2926 Chester Avenue, Cleveland, OH 44114
(877) 514-5336

Visit: FloorPrep.com
info@floorprep.com

© 2025 Dependable, LLC™, All rights reserved.
Printed in U.S.A. All logos/images are trademarks of Dependable, LLC. Cleveland, OH USA.
DEP25SellSheet_652098-09_0425

